
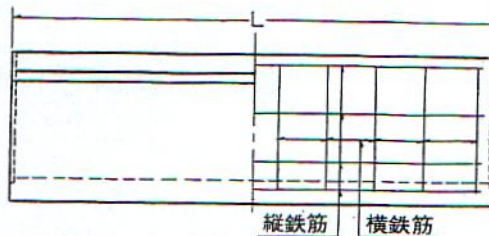


# 鉄筋コンクリートベンチフリューム

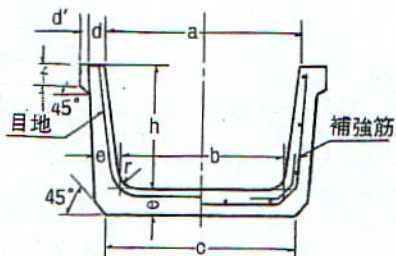

規格表

呼び名	寸 法 mm											鉄 筋				標準重量
	a	b	c	d	d'	e	f	h	r	ℓ	縦鉄筋		横鉄筋			
											径	本数	径	本数		
200	200	170	205	30	10	35	25	150	30	1,000	3.2	8	2.6	10	45	
250	250	215	250	30	10	35	30	175	30	1,000	3.2	9	2.6	11	53	
300	300	260	300	30	10	40	30	200	40	1,000	3.2	9	3.2	10	68	
350	350	300	345	35	10	45	35	235	50	1,000	3.2	10	3.2	11	90	
400	400	345	395	40	15	50	40	260	50	1,000	4.0	10	4.0	10	114	
450	450	390	440	40	15	50	40	295	50	1,000	4.0	12	4.0	10	127	
500	500	435	490	45	15	55	45	320	60	1,000	5.0	12	4.0	11	154	
550	550	475	535	45	—	60	—	355	60	1,000	5.0	12	5.0	10	176	
600	600	520	580	45	—	60	—	380	60	1,000	5.0	12	5.0	10	189	
650	650	565	630	45	—	65	—	415	70	1,000	5.0	13	5.0	11	219	
700	700	610	680	50	—	70	—	440	70	1,000	5.0	13	5.0	11	254	
800	800	695	770	50	—	75	—	490	70	1,000	5.0	14	6.0	10	299	
900	900	785	870	55	—	85	—	550	80	1,000	5.0	14	6.0	11	379	
1,000	1,000	875	965	55	—	90	—	600	80	1,000	5.0	15	6.0	12	435	

(注) 補強筋は呼び名1,000のフリュームについてのみ径5.0mmのものを片側に6箇所ずつ入れる